



Plumbing Position:

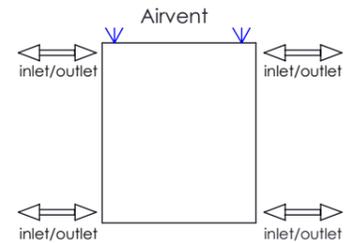


Vertical / Horizontal Mount
 All Dimensions are in mm
 Max. Working Pressure: 10 Bar
 Max. Working Temperature: 120°
 C Inlet / Outlet : 1/2" BSP
 Fuel : H & E/H/D

Manufacturing Tolerance : - 5 mm

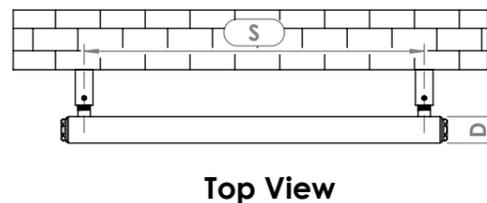

Installation Accessories:

-  x4  x4
-  x4  x4
-  x4  x1

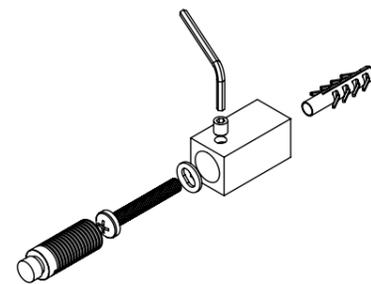

Height	Length	Depth	Pipe Centres	Bracket Centres	Heat Output		
H	L	D	C-C1	F	S	BTU	Watts
mm	mm	mm	mm	mm	mm		
600	315	30	405-570	330	275	943	276
600	425	30	515-570	330	385	1257	368
600	535	30	625-570	330	495	1728	506
600	700	30	790-570	330	660	2043	598
600	810	30	900-570	330	770	2357	690
1000	425	40	515-970	730	385	2104	616
1000	535	40	625-970	730	495	2893	847
1000	700	40	790-970	730	660	3419	1001
1200	425	40	515-1170	930	385	2541	744
1200	535	40	625-1170	930	495	3494	1023
1200	700	40	790-1170	930	660	4129	1209
1500	315	40	405-1470	1230	275	2377	696
1500	425	40	515-1470	1230	385	3170	928
1500	535	40	625-1470	1230	495	4358	1276
1800	205	40	295-1770	1530	165	1899	556
1800	315	40	405-1770	1530	275	2849	834
1800	425	40	515-1770	1530	385	3798	1112
1800	535	40	625-1770	1530	495	5222	1529
2000	205	40	295-1970	1730	165	2118	620
2000	315	40	405-1970	1730	275	3177	930
2000	425	40	515-1970	1730	385	4235	1240