


Geberit low-height furniture cistern 6 litres, pneumatic flush actuation



Example image

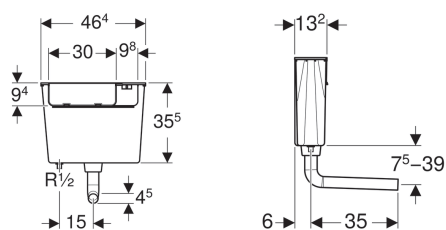

Application purposes

- For installation in bathroom furniture
- For floor-standing WCs
- For single flush

Characteristics

- Flush actuation pneumatic
- Flush pipe connection with compression joint
- Cistern fulfils standard requirements in accordance with EN 14055, Class II
- Water supply connection on the bottom left

Technical data

Flow pressure	0.1-10 bar
Maximum operating temperature, water	25 °C
Flush volume, factory setting	5.8 l

Scope of delivery

- Flush bend 90°
- Fastening for flush bend
- Cup for flush volume reduction 4.0 / 2.6 l
- Fastening material

Art. no.

109.721.00.2



- Compatible with all pneumatic actuators
- For single or dual flush
- The cistern can be operated with used water (rainwater) provided it is passed through a filter system first