


Geberit WC flush control with electronic flush actuation, mains operation, dual flush, IR button

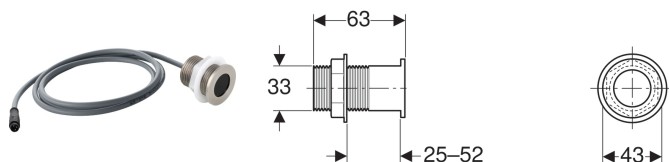

Example image

Application purposes

- For releasing a dual flush
- For bathroom furniture
- For Geberit Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block

Characteristics

- Single flush can be triggered via flush plate
- Cover plates and stop-and-go flush actuators can be mounted
- Can be combined with Geberit flush plates for single flush and stop-and-go flush or Geberit cover plate
- Power supply via power supply unit
- External power supply unit
- Transformation of mains voltage to extra-low voltage, 4.1 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- With push-fit connection with cross-polarity protection

- Interval flush preset
- Low-noise lifting mechanism
- Electrical lifting device, self-calibrating

Technical data

Nominal voltage	85-240 V AC
Operating voltage	4.1 V DC
Cable length	1.9 m

Scope of delivery

- Support block with servomotor and lifting device, premounted
- Electrical control
- Power supply unit

To order additionally

- Flush plate

Art. no.	Colour / surface	Material designation
115.858.00.1		Stainless steel
115.858.21.1	gloss chrome-plated	Stainless steel



- Surround available which illustrates small and large flush operation. Gloss Chrome 242.935.21.1 and Brushed Stainless Steel 242.935.00.1