


Geberit WC flush control with pneumatic flush actuation, single flush, with locked nuts, for institutions

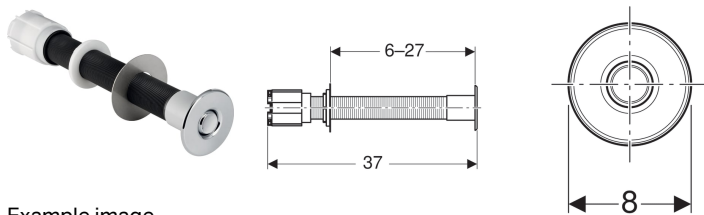

Example image

Application purposes

- For pneumatic remote flush actuation of Geberit exposed and concealed cisterns
- For single flush
- For solid and drywall construction
- For concealed installation
- For institutions
- For Geberit Sigma concealed cisterns 12 cm
- For Geberit Omega concealed cisterns 12 cm
- For Geberit Delta concealed cisterns 12 cm
- For Geberit Kappa concealed cisterns 15 cm
- For Geberit exposed cisterns AP123
- For Geberit exposed cisterns AP140
- For bathroom furniture

Characteristics

- Actuator made of brass, chrome-plated
- Can be combined with Geberit flush plates for single flush and stop-and-go flush or Geberit cover plate
- Round design

Technical data

Actuation force | < 25 N

Scope of delivery

- Actuator
- Pneumatic flushing device
- Pneumatic hose, length 2 m

Art. no.	Colour / surface	Material designation
115.943.21.1	gloss chrome-plated	Brass



- 50 mm hole required