


RADOX - Eros

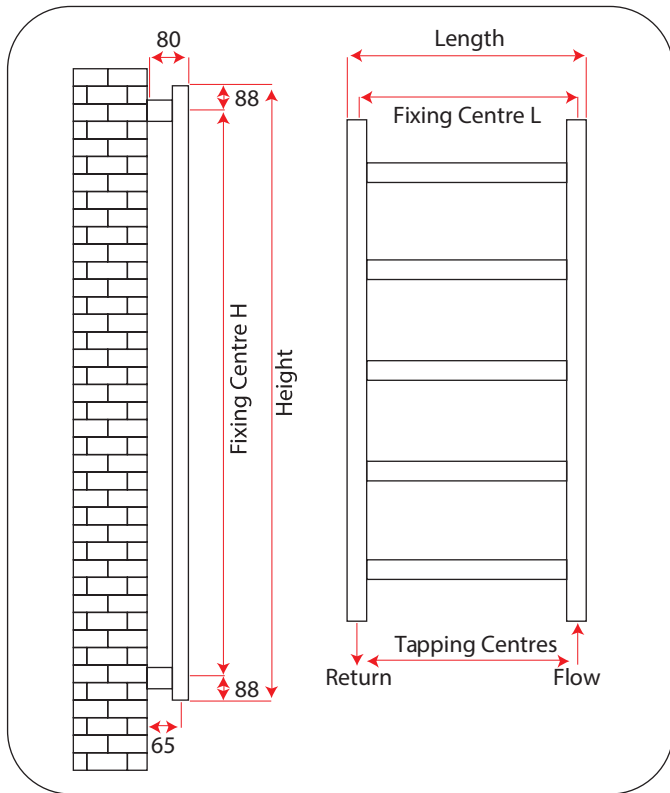


- All the dimensions are shown in millimetres
- Tube dia 40mm x 30mm
- Header tube dia 40mm x 30mm
- Bracket length - 50mm
- ½ inch BSP bottom opposite end connections
- Test pressure: 10 Bar
- Max working temperature: 8 Bar
- Heat output - in accordance with EN 442

Please Note:

- Please allow minimum of 100mm for valves
- Summer Element use will affect pipe centres
- Not suitable for use on domestic hot water system
- The flow and return can be reversed

Eros	Water Content (L)	Weight (KG)	Tapping Centres +/- 2mm	Fixing Centres (H) +/- 2mm	Fixing Centres (L) +/- 2mm	Height (mm)	Length (mm)
RXER-0800500	3.8	6.1	460	699	460	800	500
RXER-1225500	5.4	8.8	460	1050	460	1225	500
RXER- 1750500	7.7	12.5	460	1575	460	1750	500
RXER-0625800	4.1	6.5	760	525	760	625	800

Installation:

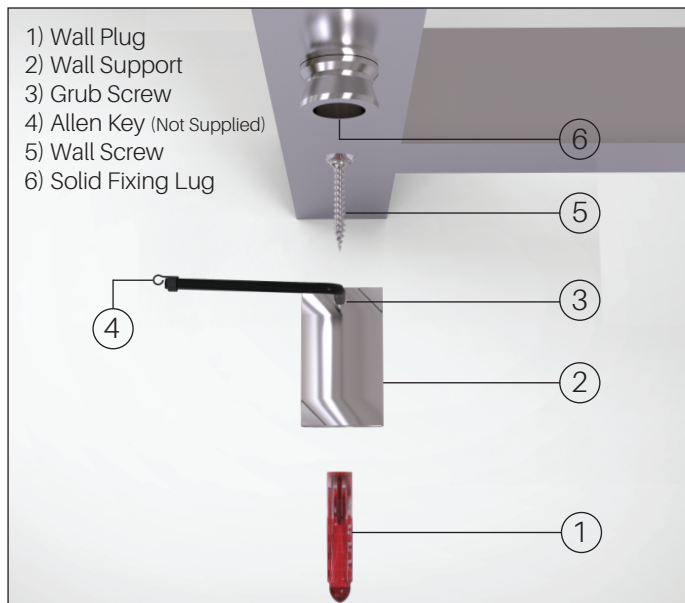

- 1) Wall Plug
- 2) Wall Support
- 3) Grub Screw
- 4) Allen Key (Not Supplied)
- 5) Wall Screw
- 6) Solid Fixing Lug

Step 1: Select the desired mounting position, make sure the wall is adequate to take the fixing points of the rail i.e anchor points must be securely attached to a stud or masonry.

Step 2: Loosely screw the wall support (Part 2) into the wall using the wall screw (5) and washer. Use wall plug (1) if you are fixing into masonry. Do not tighten fully.

Step 3: Manoeuvre the rail back onto the bracket and tighten with the grub screw (3).

Cleaning:

- Do not use any abrasive or chemical cleaners to clean the radiators as this will cause damage to the surface finish. Please use warm water and a damp cloth.
- Do not clean when hot.