


TEXTURE



GRID




FRAME




Attention: frame only for straight sides.

STANDARD COLOURS

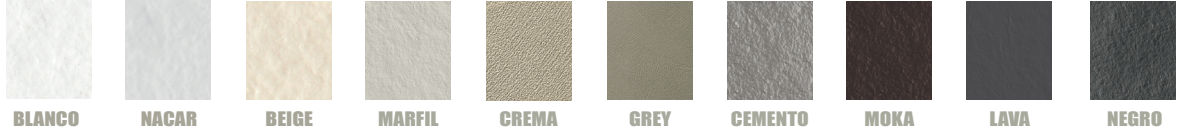

NATURALLY MADE COLOURS

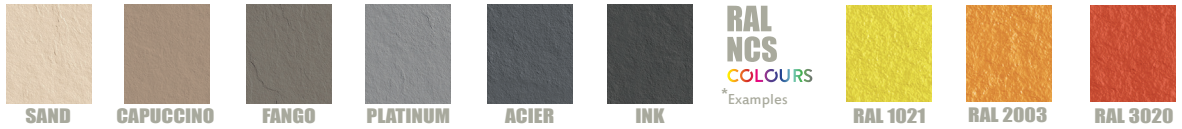

SIZES

Attention: Maximun sizes might vary ± 1%

	A (cm)	B (cm)	C (cm)
	100	70/80/90	50
	120	70/80/90/100	60
	140	70/80/90/100	70
	160	70/80/90/100	80
	180	70/80/90/100	90
	200	70/80/90/100	100

	A (cm)	B (cm)	C (cm)
	90	90	45
	100	100	50

WASTE VALVE

Attention: consult for other models

WASTE VALVE	EVACUATION	WASTE VALVE	EVACUATION
✓ STANDARD WASTE VALVE	31,8 l/min	VERTICAL WASTE VALVE	25,8 l/min

TECHNICAL SPECIFICATIONS

- Possibility of custom cutting.
- Hydrolisis resistant. Orthophtalic polyester free.
- Resistant to thermal shock. Class 1 EN UNE-EN 14527:2006 + A1:2010.
- Safe cut. Material without silica.
- Impact resistant.
- Coloured mass.

TEST

	UNE-ENV 12633:2003 Annex A	DIN 51097:1992	French Normative XP P 05-010
	CLASS 2	-	-

- Included
- Material: AKRON (Composite in polyurethane base with mineral fillers).
- Optional
- Installation: basic, floor level or raised. Consult the installation manual included in the packaging.