




Front View

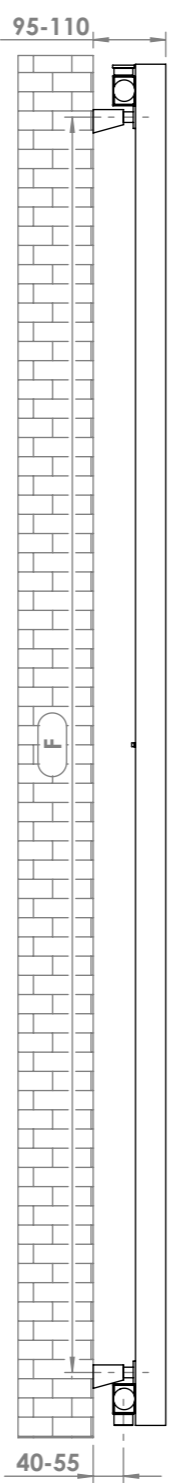


Side View

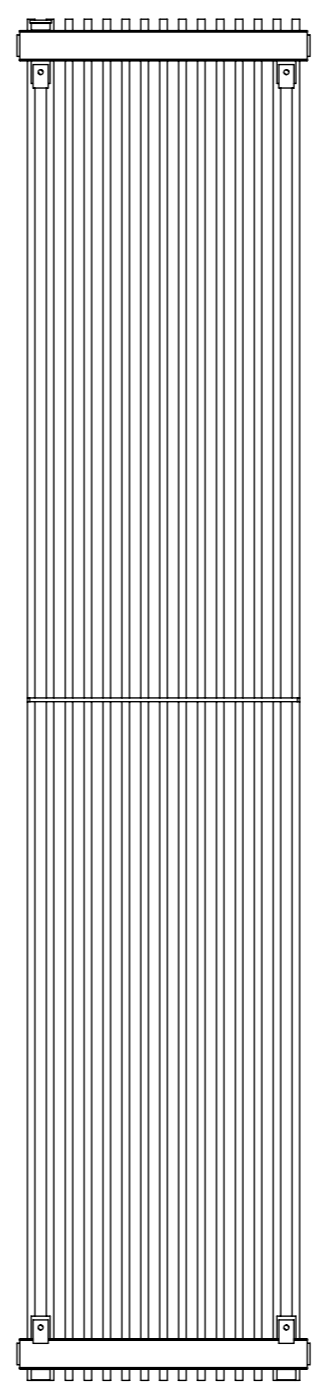


Back View

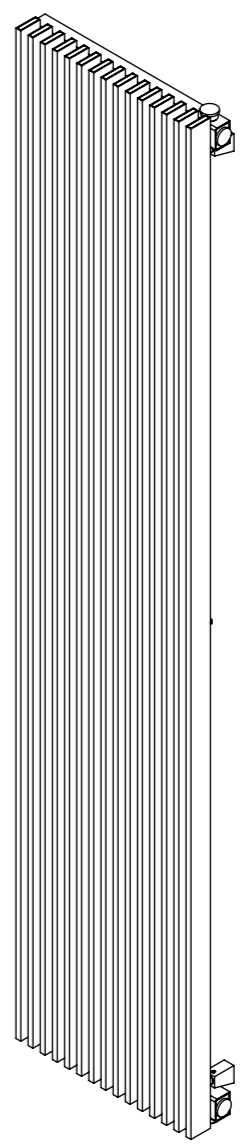

Venetian

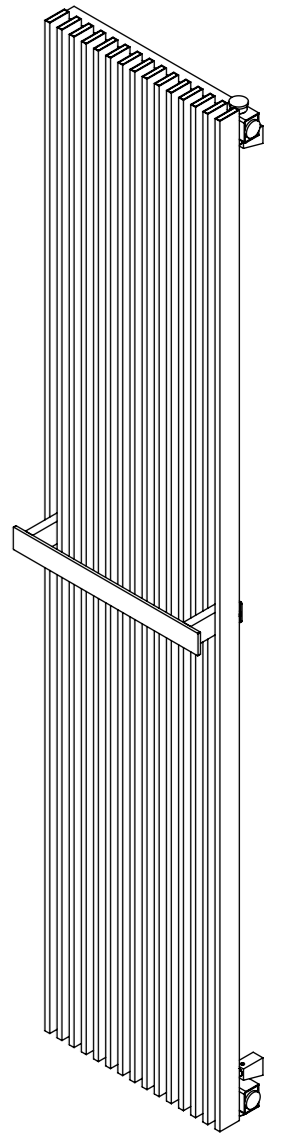







Venetian **VTB Accessories**

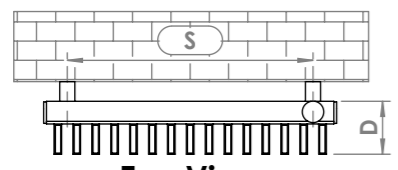


Top View

When mounting vertically, please observe that the collector fitted with a flow diverter is mounted at the bottom. This can be verified by visually checking or by referring to the installation diagram

Installation Accessories:


-  x4
-  x4
-  x4
-  x4
-  x4
-  x1

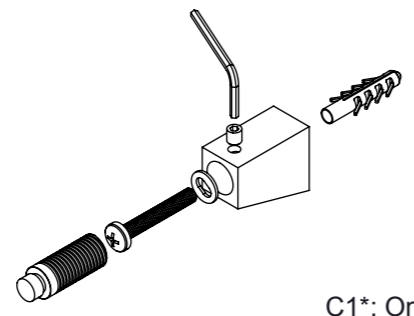

Vertical/horizontal mount
 All Dimensions are in mm
 Max.Working Pressure: 10 Bar
 Max.Working Temperature: 95° C
 Inlet / Outlet : 1/2" BSP
 Fuel : H & E/H/D

C1*: Only available for mininum eight profiles
 Manufacturing Tolerance : - 5 mm

Plumbing Position: Vertical

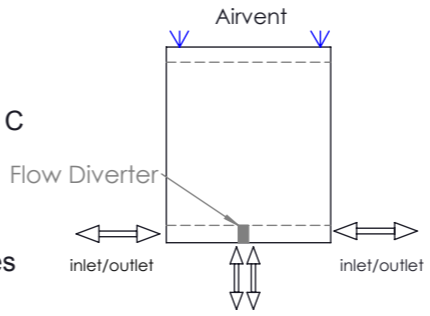

| Height | Length | Depth | Pipe Centres | Bracket Centres | Heat Output | | |
|--------|--------|-------|--------------|-----------------|-------------|-------|-------|
| H | L | D | C-C1 | F | S | BTU | Watts |
| mm | mm | mm | mm | mm | mm | | |
| 700 | 505 | 70 | 450-595 | 560 | 450 | 3621 | 1060 |
| 700 | 630 | 70 | 575-720 | 560 | 575 | 4526 | 1325 |
| 700 | 755 | 70 | 700-845 | 560 | 700 | 5431 | 1590 |
| 1000 | 380 | 70 | 325-470 | 860 | 325 | 3919 | 1148 |
| 1000 | 505 | 70 | 450-595 | 860 | 450 | 5226 | 1530 |
| 1000 | 630 | 70 | 575-720 | 860 | 575 | 6532 | 1913 |
| 1500 | 255 | 70 | 200-345 | 1360 | 200 | 3928 | 1150 |
| 1500 | 380 | 70 | 325-470 | 1360 | 325 | 5892 | 1725 |
| 1500 | 505 | 70 | 450-595 | 1360 | 450 | 7856 | 2300 |
| 1500 | 630 | 70 | 575-720 | 1360 | 575 | 9820 | 2875 |
| 1800 | 130 | 70 | 75 | 1660 | 75 | 2323 | 680 |
| 1800 | 255 | 70 | 200-345 | 1660 | 200 | 4645 | 1360 |
| 1800 | 380 | 70 | 325-470 | 1660 | 325 | 6968 | 2040 |
| 1800 | 505 | 70 | 450-595 | 1660 | 450 | 9290 | 2720 |
| 1800 | 630 | 70 | 575-720 | 1660 | 575 | 11611 | 3400 |
| 2000 | 130 | 70 | 75 | 1860 | 75 | 2613 | 765 |
| 2000 | 205 | 70 | 150 | 1860 | 150 | 4181 | 1224 |
| 2000 | 255 | 70 | 200-345 | 1860 | 200 | 5226 | 1530 |
| 2000 | 380 | 70 | 325-470 | 1860 | 325 | 7839 | 2295 |
| 2000 | 505 | 70 | 450-595 | 1860 | 450 | 10450 | 3060 |
| 2000 | 630 | 70 | 575-720 | 1860 | 575 | 13062 | 3825 |